

HYUNDAI SOLAR MODULE

VG
SERIES

PERC Shingled

HiE-S395VG HiE-S400VG HiE-S405VG
HiE-S410VG HiE-S415VG



Shingled
Technology



For Both
Residential &
Commercial
Applications



More Power
Generation
In Low Light



M6 PERC Shingled

M6 PERC Shingled Technology provides ultra-high efficiency with better performance in low irradiation. Maximizes installation capacity in limited space.



Corrosion Resistant

(Production available on request)

Various tests under harsh environmental conditions such as ammonia and salt-mist passed.



Mechanical Strength

Tempered glass and reinforced frame design withstand rigorous weather conditions such as heavy snow and strong wind.



HYUNDAI

Reliable Warranty

Global brand with powerful financial strength provide reliable 25-year warranty. (Australia and Europe Only)



UL / VDE Test Labs

Hyundai's R&D center is an accredited test laboratory of both UL and VDE.

Hyundai's Warranty Provisions



25-Year Product Warranty

• On materials and workmanship
Australia and Europe Only



25-Year Performance Warranty

• Initial year: 98.0%
• Linear warranty after second year: with 0.55%p annual degradation, 84.8% is guaranteed up to 25 years.

About Hyundai Energy Solutions Co.,Ltd

Established in 1972, Hyundai Heavy Industries Group is one of the most trusted names in the heavy industries sector and is a Fortune 500 company. As a global leader and innovator, Hyundai Heavy Industries is committed to building a future growth engine by developing and investing heavily in the field of renewable energy.

As a core energy business entity of HHI, Hyundai Energy Solutions has strong pride in providing high-quality PV products to more than 3,000 customers worldwide.

Certification



Electrical Characteristics

		Mono-Crystalline Module(HiE-S_VG)				
		395	400	405	410	415
Nominal Output(Pmpp)	W	395	400	405	410	415
Open Circuit Voltage(Voc)	V	46.3	46.4	46.5	46.6	46.7
Short Circuit Current(Isc)	A	10.92	10.97	11.02	11.07	11.12
Voltage at Pmax(Vmpp)	V	38.5	38.6	38.7	38.8	38.9
Currnt at Pmax(Impp)	A	10.26	10.36	10.47	10.57	10.67
Module Efficiency	%	20.2	20.4	20.7	20.9	21.2
Cell Type	-	PERC Mono-Crystalline Silicon Shingled				
Maximum System Voltage	V	1,500				
Temperature Coefficiency of Pmax	%/°C	-0.34				
Temperature Coefficiency of Voc	%/°C	-0.27				
Temperature Coefficiency of Isc	%/°C	0.04				

*All Date at STC (Standard Test Conditions). Above data may be changed without prior notice.

*Tolerance of Pmax:0~+5W.

*Measuring uncertainty of power:±3%.

*Performance deviation of Voc[V], Isc [A], Vm [V], and Im[A]:±3%.

Mechanical Characteristics


Dimensions	1,719 × 1,140 × 35mm (L × W × H)		
Weight	22kg		
Solar Cells	340 Cells, PERC Mono-crystalines Shingled (166 × 166mm)		
Output Cables	Length 1,500mm, 1 × 4mm ²	Connector	Stäubli : MC4-Evo2
Junction Box	Rated Current : 20A, IP67, TUV&UL		
Construction	Front Glass: White toughened safety glass, 3.2mm Encapsulation: EVA (Ethylene-Vinyl-Acetate)		
Frame	Anodized aluminum		

Installation Safety Guide



- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Operating Cell Temperature	42.3°C (±2°C)
Operating Temperature	-40 ~ 85° C
Maximum System Voltage	DC 1,500
Series Fuse Rating	20A
Maximum Surface Load Capacity	Front 5,400 Pa Rear 2,400 Pa

Module Diagram (unit : mm)

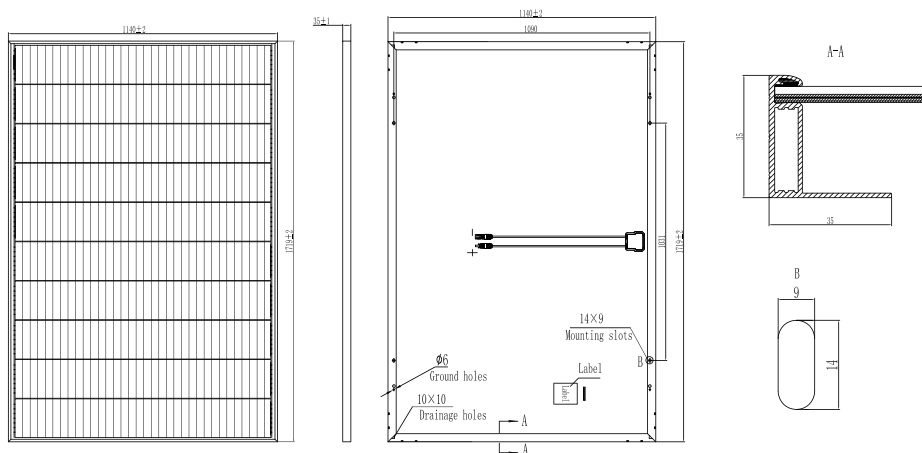

I-V Curves



Manufactured in China

HYUNDAI
ENERGY SOLUTIONS



Sales & Marketing
sales@hyundai-es.co.kr

Printed date: 08/2021