


# SOLID Bifacial

Glass/Glass

60 cell

Frameless

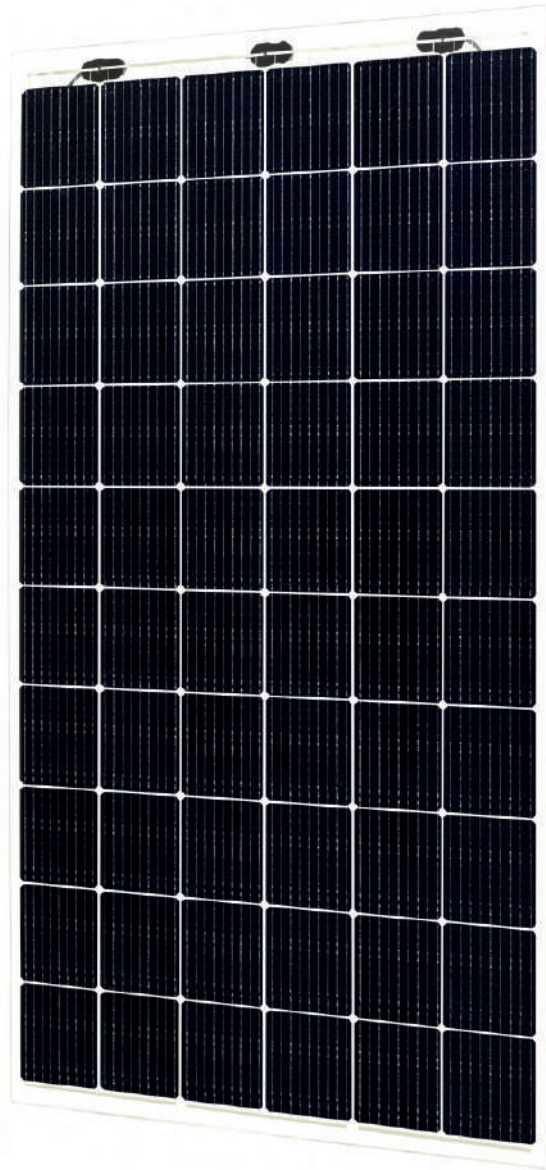


Self-cleaning effect




Extreme load resistance




Fire class A



Salt mist resistance



Ammonia resistance



Dust and sand resistance

Positive sorting up to +5W

Front side ⚡ 360 W

30 Year product warranty

87 % Power guarantee

30 Year efficiency guarantee

# SOLID Bifacial

## Glass/Glass

# 60 cell



## Frameless

| Electrical data (STC*)               |                 |
|--------------------------------------|-----------------|
| Maximum power                        | <b>360</b>      |
| Cell technology                      | <b>Bifacial</b> |
| Open circuit voltage ( $V_{oc}/V$ )  | 40,41           |
| Short circuit current ( $I_{sc}/A$ ) | 11,09           |
| Max power voltage ( $V_{mpp}/V$ )    | 34,44           |
| Max power current ( $I_{mpp}/A$ )    | 10,48           |
| Module efficiency ( $\eta$ )         | 19,38%          |
| Max system voltage (V)               | 1500            |
| Max current (A)                      | 15              |
| Power tolerance                      | 0/+5W           |

\*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM 1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%. All transparency values are approximate +/-3%.

| Additional power gain   | 5%  | 10% | 20% | 25% |
|-------------------------|-----|-----|-----|-----|
| Total module power (Wp) | 378 | 396 | 432 | 450 |

### Dimensions & Mounting

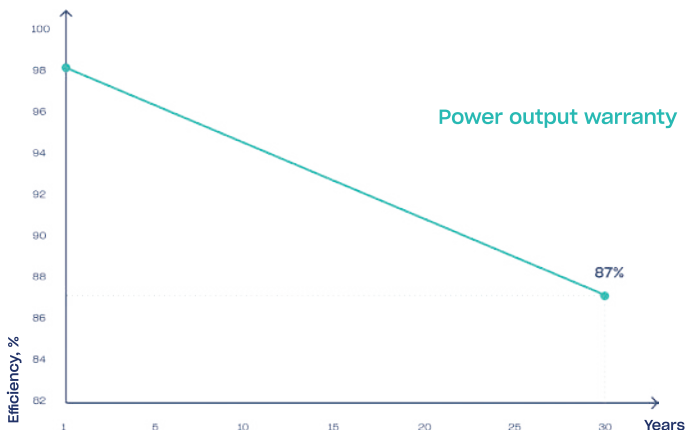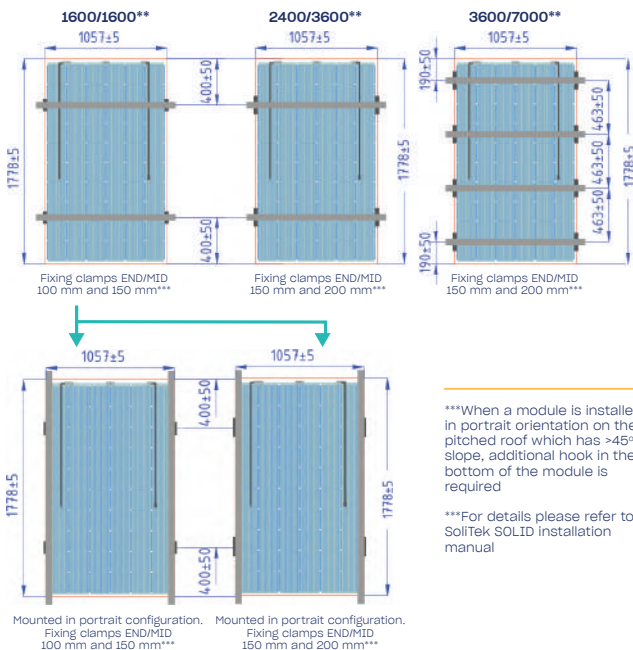

| Temperature ratings                          |                           |
|--|---------------------------|
| Current temperature coefficient ( $\alpha$ ) | +0.04% / °C               |
| Voltage temperature coefficient ( $\beta$ )  | -0.35% / °C               |
| Power temperature coefficient ( $\delta$ )   | -0.47% / °C               |
| Nominal operating module temperature         | 46 °C                     |
| Mechanical data                              |                           |
| Dimensions (LxWxH) (mm)                      | 1770x1049x7,1             |
| Dimensions with edge sealing (LxWxH) (mm)    | 1778±5x1057±5x7,1         |
| Weight (kg)                                  | 30                        |
| Front / Back glass (mm)                      | 3                         |
| Cell Type                                    | Bifacial                  |
| Cell Size (mm)                               | 166x166                   |
| Busbars                                      | 9                         |
| Transparency %                               | 10                        |
| Cell configuration                           | 6x10                      |
| Frame  | Frameless                 |
| Operating temperature (°C)                   | -40 ÷ +85                 |
| Design load (wind/snow) (Pa)                 | 3600/7000**               |
| Maximum test load (wind/snow) (Pa)           | 5400/10500                |
| Junction box / IP class                      | Split junction box / IP68 |
| Cable cross section size (mm²)               | 4                         |
| Cable length                                 | 1,2 m                     |
| Bypass diodes                                | 3                         |
| Connector                                    | MC4 compatible            |

\*\*Safety factor 1.5

### Attention

- Always check if your system is compatible with local environmental conditions (wind / snow load, temperatures) on your site to ensure safety and long-term energy production.
- Do not connect differently orientated PV panels in the same string / MPPT of the inverter (unless optimizers are used).
- Do not connect strings with an unequal amount of PV panels in one MPPT (unless optimizers are used).
- Use PV panels of same electrical parameters in one string/MPPT (unless optimizers are used).
- Always ensure that your inverter is equipped with DC disconnecter. If not it is recommended to install it externally.
- Never let different metals come in contact with each other. Use bi-metallic plates or plastic separators to eliminate galvanic corrosion.
- It is highly recommended to install SPD's in both AC and DC circuits because overvoltages void the warranty for inverters and also panels if they are harmed.
- It is highly recommended to ground PV panels mounting system and to install lightning protection in site.
- If the mounting rails are installed across the module, bifaciality effect will be lower due to cells shading.

### Tips for better power output

- Better module ventilation and shorter connection cables increase electrical energy production.
- Always observe object/mutual shading in site. Shading can drastically cut electrical energy generation output.
- Increase PV panel height from the ground so that more light can travel beneath the module and then reflect.
- The Albedo value increases significantly if the modules are installed above white, lightreflecting surfaces.



This datasheet is not legally binding. The manufacturer reserves the right to make changes to product specifications and / or product features without prior notice. The most recent versions of all documents (T&C's, datasheets, warranties and installation manuals can always be found on our website at [www.solitek.eu](http://www.solitek.eu))



PRODUCED USING 100% RENEWABLE ENERGY