

SOLID Framed

Framed_Glass/Glass_Transparent


120 cell



Fire class A



Salt mist
resistance



Ammonia
resistance



Hail resistance
class 3



98,8 %
recyclable



35% of recycled
glass content



Positive sorting up to +5W

Front side ⚡505 W



30 Year
product
warranty



90% Power
warranty

30 Year
efficiency
warranty

Electrical data (STC*)	
Maximum power (W)	505
Cell technology	N type, TOPCon - bifacial
Open circuit voltage (V_{oc}/V)	42,28
Short circuit current (I_{sc}/A)	14,25
Max power voltage (V_{mpp}/V)	36,47
Max power current (I_{mpp}/A)	13,85
Module efficiency (η)	22,31 %
Max system voltage (V)	1500
Max current (A)	25
Power tolerance	0/+5W

*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%.

Warranty	
30 years product warranty	
30 years efficiency warranty	
First year degradation (%)	1%
Annual degradation (%)	0,31%
Power in year 30 (%)	90%

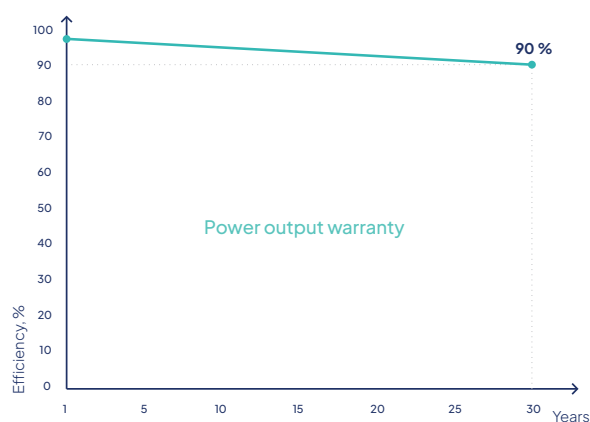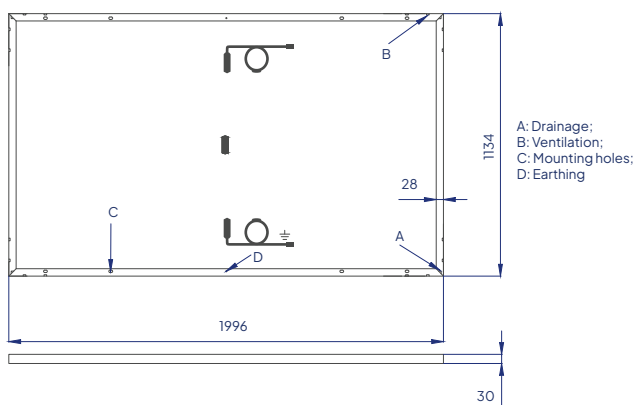

Temperature ratings	
Current temperature coefficient (α)	+0,045 % / °C
Voltage temperature coefficient (β)	-0,250 % / °C
Power temperature coefficient (δ)	-0,300 % / °C
Nominal operating module temperature	46 °C

Mechanical data	
Dimensions (LxWxH) (mm)	1996x1134x30
Weight (kg)	29
Front glass (mm)	2, structured, low reflection, with AR coating
Back glass (mm)	2, transparent
Cell Size (mm)	182x95,8
Busbars	18
Cell configuration	6x20
Frame	Black anodized aluminium frame
Rated operating altitude (m)	Up to 2000
Operating temperature (°C)	-40 ÷ +85
Maximum test load (wind/snow) (Pa)	3600/8100
Junction box / IP class	Split junction box / IP68
Cable cross section size (mm²)	4
Cable length (m)	1,2
Bypass diodes	3
Connector	MC4-EVO2

Packing information	
Modules per pallet (pcs)	31
Dimensions of a pallet (LxWxH) (mm)	2045x1205x1157
Weight of a pallet (gross) (kg)	963
Pallets per 13,6 m truck (pcs)	24
Modules per 13,6 m truck (pcs)	744

Certifications	
IEC 61215:2021; IEC 61730:2023	
Cradle to Cradle (C2C)	Gold level
IEC 62716:2013	Ammonia corrosion testing
IEC 61701:2020	Salt mist corrosion testing
IEC 61215-2:2021	30 mm hailstone - Hail resistance class 3 (HW3)
ISO 9001:2015	Quality management systems
ISO 14001:2015	Environmental management systems
ISO 45001:2018	Occupational health and safety
SundaHus	A level assessment
Produced using 100% renewable energy	
Membership at Svensk Solenergi	



Product assessed in
SundaHus Material Data



PRODUCED USING 100%
RENEWABLE ENERGY



Svensk
Solenergi



This datasheet is not legally binding. The manufacturer reserves the right to make changes to product specifications and / or product features without prior notice. The most recent versions of all documents (T&C's, datasheets, warranties and installation manuals) can always be found on our website at www.solitek.eu

