

# UC 24-12

12V 24AH

Deep Cycle

# Ultracell®

'Quality in Every Language'

## UC24-12



## Physical Specification


Part Number:	<b>UC24-12</b>
Length:	<b>166 ± 2 mm (6.54 inches)</b>
Width:	<b>175 ± 2 mm (6.89 inches)</b>
Container Height:	<b>125 ± 2 mm (4.92 inches)</b>
Total Height (with terminal):	<b>125 ± 2 mm (4.92 inches)</b>
Approx Weight:	<b>Approx 8.7kg (19.2lbs)</b>

## Specifications

	Normal Voltage	12V
	Normal Capacity (20HR)	24.0AH
Terminal Type	Standard Terminal	F3
	Optional Terminal	
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	ABS(UL94:VO)
Rated Capacity	25.7 AH/1.29A	(20hr, 1.80V/cell, 25°C / 77°F)
	24.0 AH/2.40A	(10hr, 1.80V/cell, 25°C / 77°F)
	21.0 AH/4.21A	(5hr, 1.75V/cell, 25°C / 77°F)
	19.1 AH/6.36A	(3hr, 1.75V/cell, 25°C / 77°F)
	15.5 AH/15.5A	(1hr, 1.60V/cell, 25°C / 77°F)
Max Discharge Current	360A (5s)	
Internal Resistance	Approx 13.0mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)
		Charge: 0 ~ 40°C (5 ~ 104°F)
		Storage: -15 ~ 40°C (5 ~ 104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 7.2A.Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%	
	25°C (77°F) 100%	
	0°C (32°F) 86%	
Design Floating Life at 20°C	12 Years	
Self Discharge	Ultracell batteries may be stored for up to 6 months at 25°C(77F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

## Dimensions

### F3 Terminal

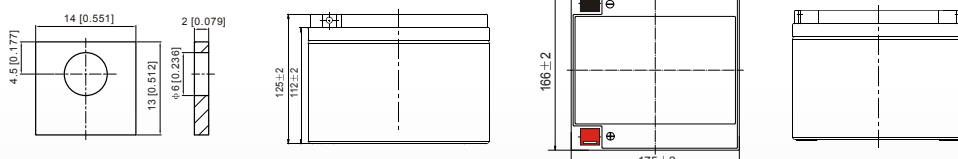

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE

Ultracell (UK) Ltd | Vesty Business Park | Vesty Road | Liverpool | L30 1NY | United Kingdom  
Tel: +44 (0) 151 523 2777 Fax: +44 (0) 151 523 0855 Email: info@ultracell.co.uk

[www.ultracell.co.uk](http://www.ultracell.co.uk)




### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	35.1	29.6	25.8	18.6	14.8	12.0	7.44	5.80	4.70	3.82	3.33	2.72	2.27	1.27
1.80V/cell	44.9	35.7	30.5	21.9	17.2	13.4	8.12	6.24	5.02	4.10	3.57	2.88	2.40	1.29
1.75V/cell	49.3	39.0	32.9	22.8	17.8	14.0	8.43	6.36	5.13	4.21	3.67	2.93	2.42	1.30
1.70V/cell	53.8	41.7	34.5	23.7	18.5	14.5	8.76	6.54	5.27	4.32	3.75	2.98	2.45	1.32
1.65V/cell	58.0	44.3	36.7	25.0	19.0	15.0	9.00	6.82	5.45	4.44	3.83	3.02	2.50	1.34
1.60V/cell	63.0	47.4	39.1	26.4	19.8	15.5	9.31	7.02	5.62	4.58	3.91	3.05	2.52	1.35


### Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	10 min	15 min	20 min	30 min	45 min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	65.6	55.7	49.2	35.7	28.6	23.3	14.5	11.3	9.21	7.50	6.58	5.38	4.49	2.55
1.80V/cell	82.7	66.3	57.3	41.6	33.0	25.9	15.7	12.1	9.78	8.03	7.03	5.70	4.75	2.57
1.75V/cell	89.7	71.8	61.1	43.0	34.0	27.0	16.3	12.3	10.0	8.23	7.22	5.79	4.79	2.59
1.70V/cell	96.4	76.1	63.9	44.6	35.3	27.8	16.9	12.6	10.2	8.41	7.36	5.87	4.84	2.64
1.65V/cell	103.3	80.4	67.6	46.8	36.0	28.6	17.3	13.2	10.6	8.64	7.51	5.96	4.93	2.67
1.60V/cell	110.2	84.9	71.2	49.0	37.2	29.4	17.8	13.5	10.8	8.88	7.65	6.01	4.98	2.68


### Discharge Characteristics

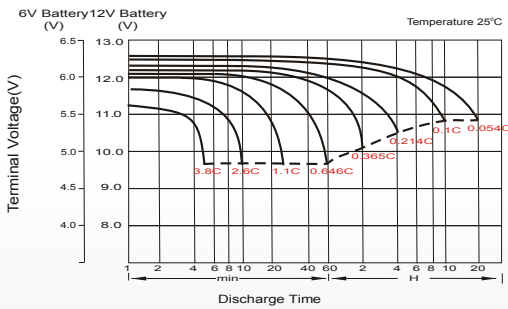


### Charging Characteristics (cycle use)

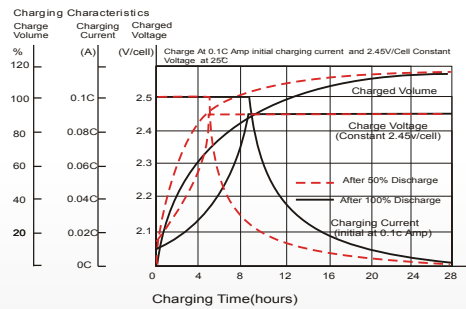


### Temperature Effects in Relation to Battery Capacity

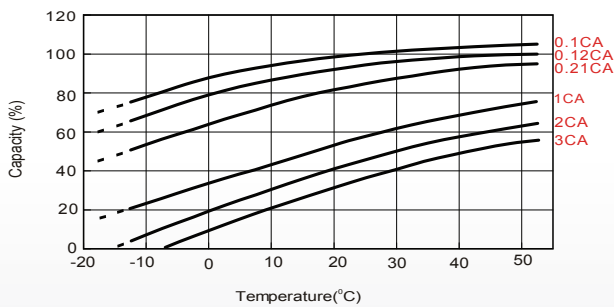

### Cycle Life in Relation to Depth of Discharge

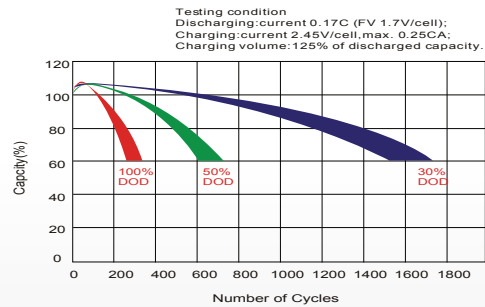

### Self Discharge Characteristics

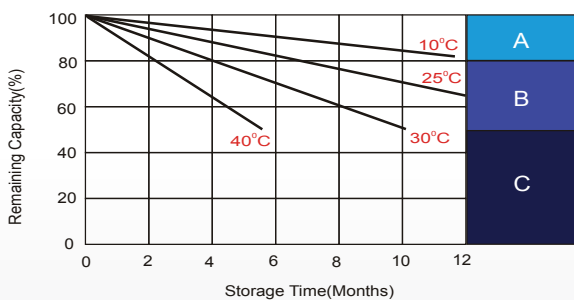

- A** No supplementary charge required  
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
  1. Charged for above 3 days at limited current 0.25CA and constant volatge 2.25V/cell.
  2. Charged for above 20hours at limited current 0.25CA and constant volatge 2.45V/cell.
  3. Charged for 8~10hours at limited current 0.05CA .
- C** Supplementary charge may often fail to recover the capacity.  
The battery should never be left standing till this is reached.

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE