

WECO



Safe.
Simple.
Scalable.

EV CHARGERS

AC CHARGING SOLUTIONS

Cutting-edge With Sleek Design
Range Of Eco-friendly Charging For Electric Vehicles

WeCo Brand and **WECO** logo are registered by WeCo Srl Italia



FEATURES

SUPPORT WIFI + LAN / 4G



OCPP1.61



INTEGRATED LEAKAGE PROTECTION



CLUSTERING CONTROL VIA CLOUD



RFID OR AUTO PLUG TO CHARGE



FAMILY MANAGEMENT



SMART LED INDICATORS



ABS ENCLOSURE



MOBILE APP




ZEER

A compact, eco-friendly AC charger for electric vehicles, offering versatile installation as either a wall-mounted unit or a free-standing station to seamlessly blend sustainability with convenience.



IP65 Certified



120mm
(4.70 in)



200mm
(8.0in)



350mm
(13.8 in)

The stand is not included in the product, the render is for demonstration purposes only.
We recommend contacting WeCo for the most up-to-date datasheet. Read warranty terms and the product manual before making any purchasing decisions.
No part of this document can be copied or reproduced without WeCo written permission.
All data is subject to change without prior notice.

ZEER

RESIDENTIAL AC CHARGER SINGLE AND THREE PHASE


Specifications

Model	ZEER 7	ZEER 11	ZEER 22
Input Voltage	AC230V±15% / single phase	AC400V±15% / three phase	AC400V±15% / three phase
Input Frequency	50/60Hz		
Maximum Output Power	7kW	11kW	22kW
Output Voltage	AC230V±15%	AC400V±15% /Three phase	AC400V±15% /Three phase
Output Current	16 A	16-32 A	16-32 A
Measurement Accuracy	Class 1.0		
Mounting Method	Wall/Stand		
Number Of Charge Guns	Single Cable		
Charging Method	Cable		
Communication Methods	Ethernet, WIFI, 4G		
Charging Control	Swipe Card / App Start Stop / Plug & Charge		
Charging Connector	IEC62196		
User Interface	Three Colour Led Light / APP		
AC Output Type	Type 2		
Earth Leakage Protection Parameters	A+6 (30 mA AC+6 mA DC)	CCID 20 mA	CCID 20 mA
Case Material	ABS		
Shell Size	350 mm * 200 mm * 120 mm		
Protection Class	IP65		
Safety Protection	Leakage, Over-voltage, Under-voltage, Overload, Grounding, Over-temperature		
Working Temperature	- 30 °C ~ +50 °C		
Relative Humidity	5% to 95%		
Altitude	≤ 2000 m		
Other Protections	Moisture-proof, Mildew-proof, Salt Spray-proof		



WECO

Quick.
Efficient.
Compact.

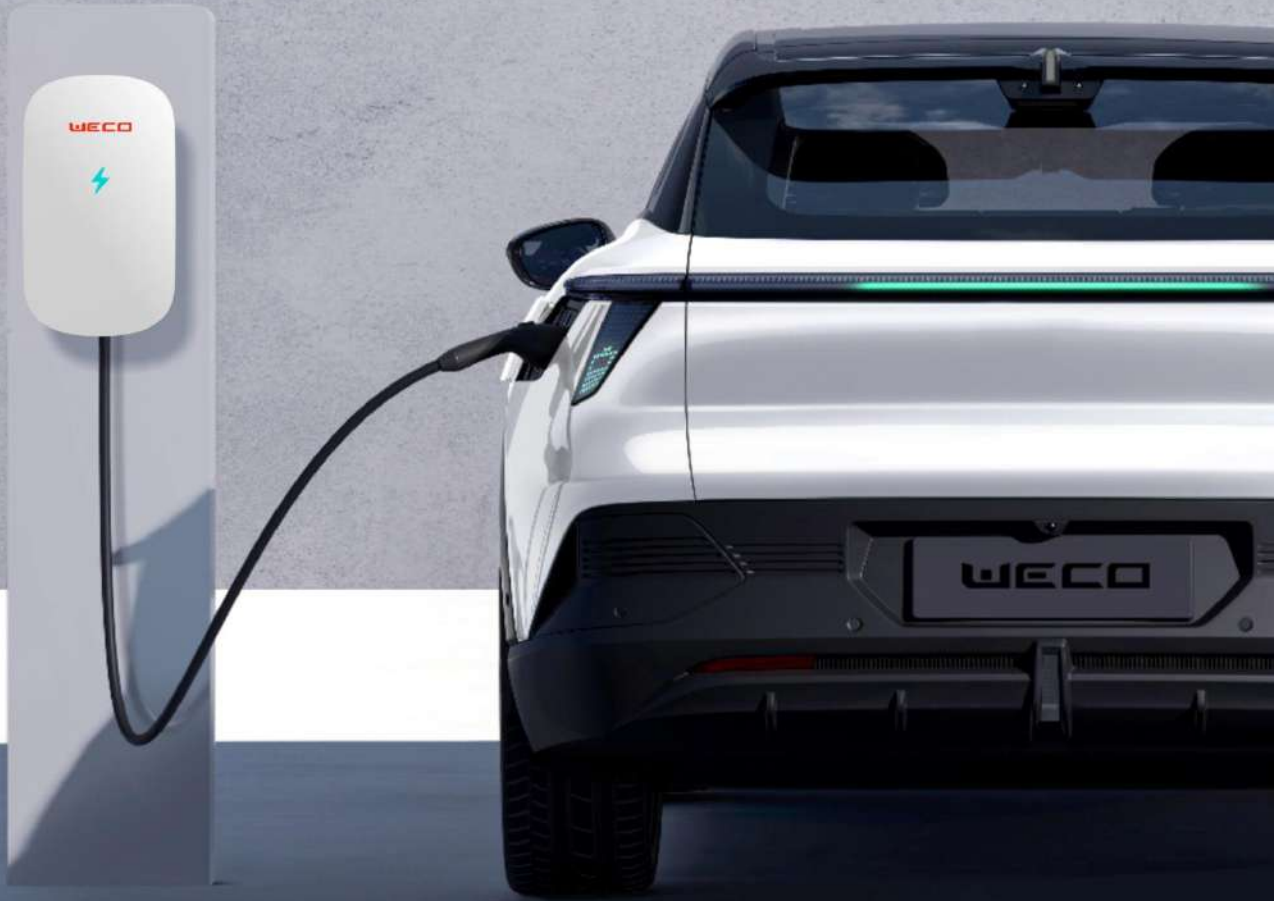

ZEER

RESIDENTIAL EV CHARGER

Wall Mounted Or Free-standing EV Charger
7-11-22kW