



350 - 365 Wp

AXITEC
high quality german solar brand

AXIworldblackpremium XL HC

High performance solar module
120 halfcell, monocrystalline

The advantages:

- 15** Years 15 years Manufacturer's warranty
- HC** High module performance through Half-Cut-technology and selected materials
- Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 100%** 100% visual electroluminescence inspection in production
- IP 68** High quality junction box and connector systems



Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

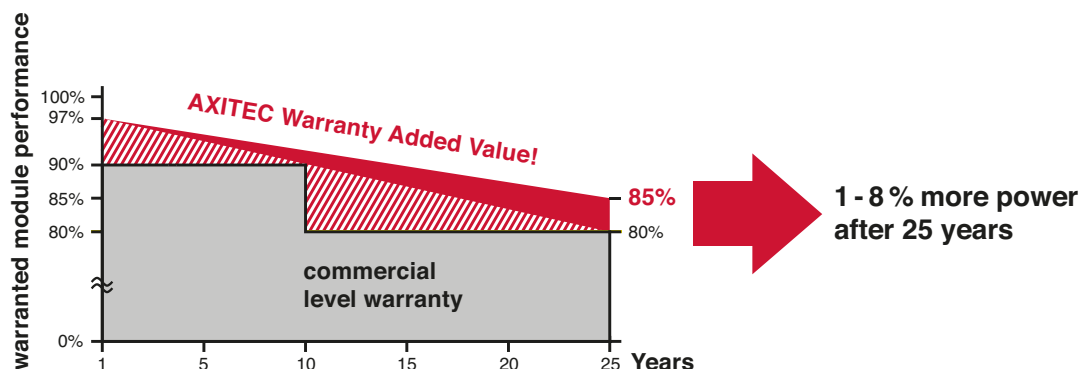


Fig. similar
120MHEN210601A-139/1

AXIworldblackpremium XL HC 350 - 365 Wp

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-350MH/120S	350 Wp	33.30 V	10.52 A	11.02 A	40.50 V	19.21 %
AC-355MH/120S	355 Wp	33.49 V	10.61 A	11.12 A	40.72 V	19.49 %
AC-360MH/120S	360 Wp	33.69 V	10.69 A	11.22 A	40.92 V	19.76 %
AC-365MH/120S	365 Wp	33.89 V	10.78 A	11.30 A	41.12 V	20.04 %

Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	120 monocrystalline high efficiency cells
Backside	Composite film
Frame	35 mm black aluminium frame

Mechanical data

L x W x H	1755 x 1038 x 35 mm
Weight	20.0 kg with frame

Mechanical load

Design load (pressure/suction)	3600 Pa / 1600 Pa
Test load (pressure/suction)	5400 Pa / 2400 Pa

Power connection

Socket	Protection Class IP68
Wire	approx. 1.2 m, 4 mm ²
Plug-in system	Plug/socket IP68, Stäubli MC4

Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	20.0 A

Permissible operating temperature -40°C to 85°C / -40F to 185F

(No external voltages greater than U_{oc} may be applied to the module)


* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.27 %/K
Current I _{sc}	0.048 %/K
Output P _{mpp}	-0.35 %/K

Low-light performance (Example for AC-365MH/120V)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2.20 A	32.62 V
400 W/m ²	4.04 A	32.99 V
600 W/m ²	6.64 A	33.25 V
800 W/m ²	8.78 A	34.53 V
1000 W/m ²	11.78 A	34.89 V

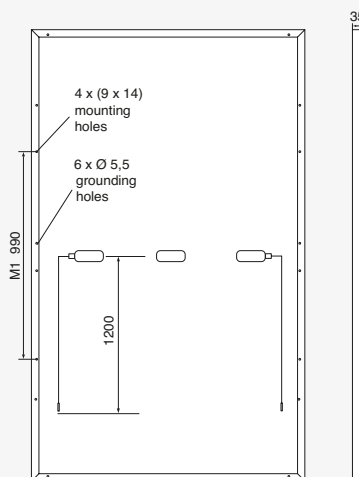

All dimensions in mm